

CEE 577: Surface Water Quality Modeling

Lecture #5
(particular solutions)
Chapra L4

Non-steady state solutions

- After a change in loading
 - how long will it take for WQ to improve?
 - what will the shape of the curve look like?
- Return to the mass balance and solve

$$V \frac{dc}{dt} = W(t) - Qc - kVc - vA_s c$$

Divide by V

$$\frac{dc}{dt} = \frac{W(t)}{V} - \frac{Q}{V}c - kc - \frac{v}{H}c$$

An eigenvalue
“the cleansing rate”

$$\frac{dc}{dt} + \lambda c = \frac{W(t)}{V}$$

Where:

$$\lambda = \frac{Q}{V} + k + \frac{v}{H}$$

$$\lambda = \frac{\alpha}{V}$$

Approximate Solution

- Non-steady state lake is described by an ODE:

$$\frac{dc}{dt} = \frac{W(t)}{V} - \frac{Q}{V}c - kc - \frac{\nu}{H}c$$

$$c_{t+\Delta t} = c_t + \frac{dc}{dt} \Delta t$$

- assuming you know the initial concentrations and coefficients, you can project future concentration numerically
- some error because dc/dt changes continuously with c

Exact Solution to MB equation

$$c = c_g + c_p$$

The general and particular solutions

- The general solution
 - where $W(t)=0$

$$\frac{dc}{dt} + \lambda c = 0$$

$$\frac{dc}{c} = -\lambda dt$$

$$\int_{c_o}^c \frac{dc}{c} = -\lambda \int_0^t dt$$

$$c \equiv c_g$$

$$\ln c|_{c_o}^c = -\lambda t|_0^t$$


$$\ln c = \ln c_o - \lambda t$$

$$c_g \equiv c = c_o e^{-\lambda t}$$

General Solution


Loading ends

$$c_g = c_o e^{-\lambda t}$$

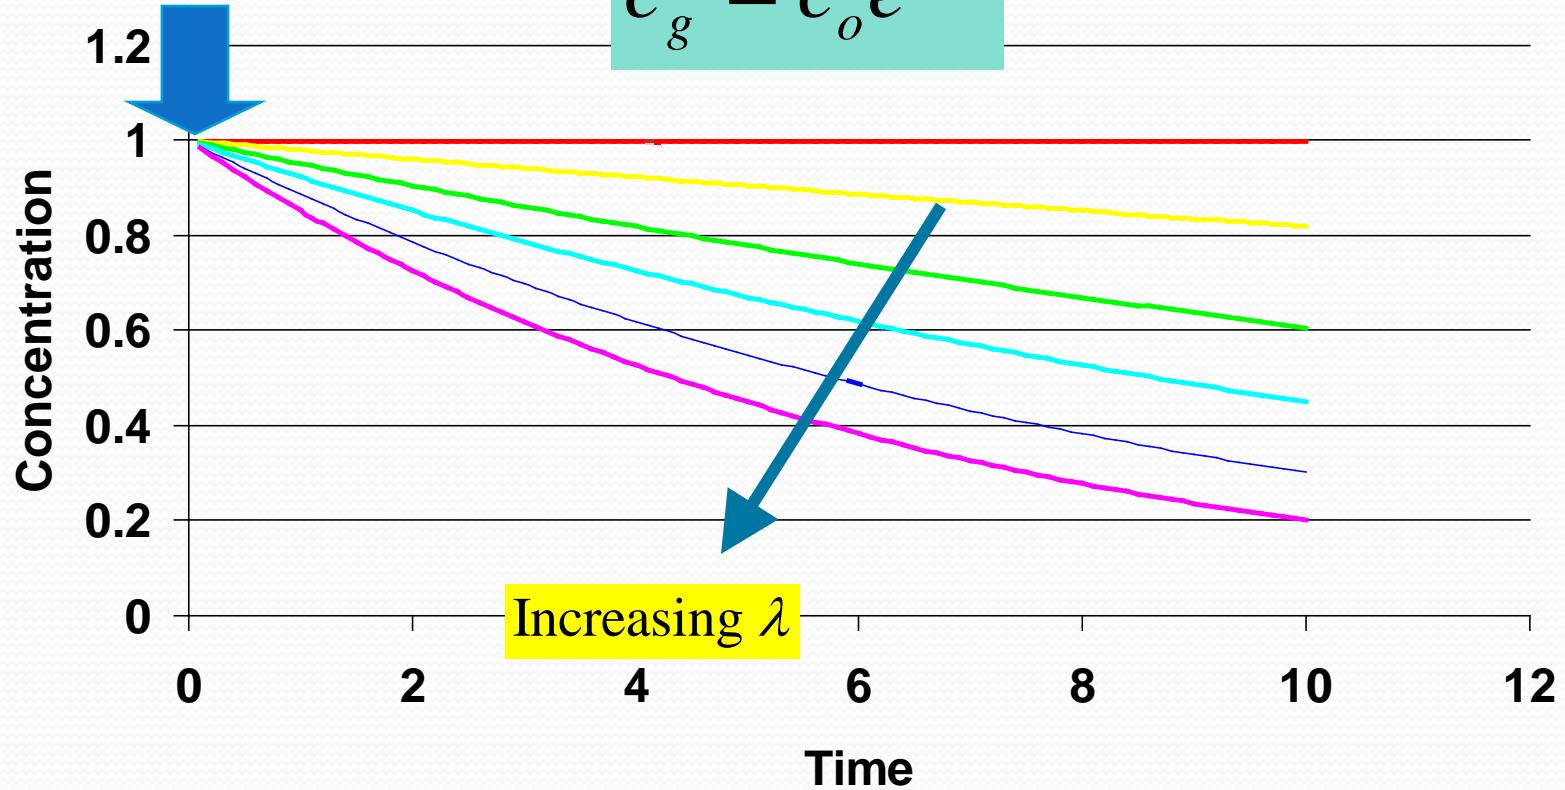

Loading Types


- Impulse, step, linear, exponential & sinusoidal

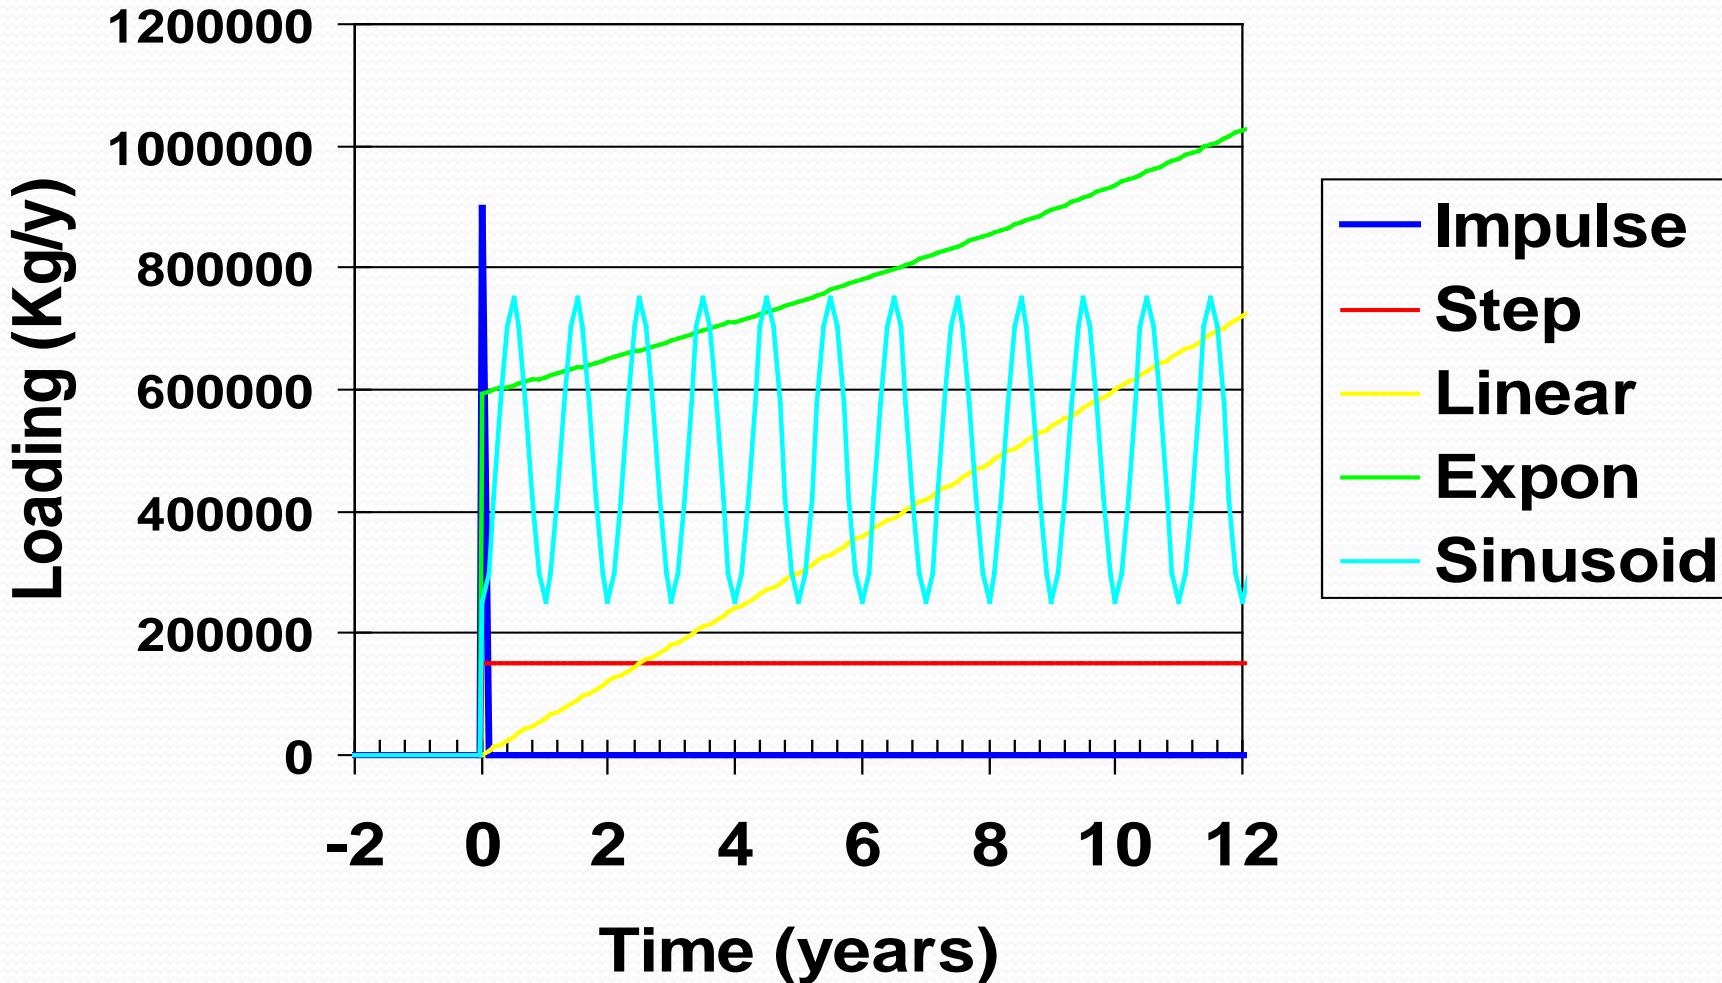

General Solution

Loading ends

$$c_g = c_o e^{-\lambda t}$$

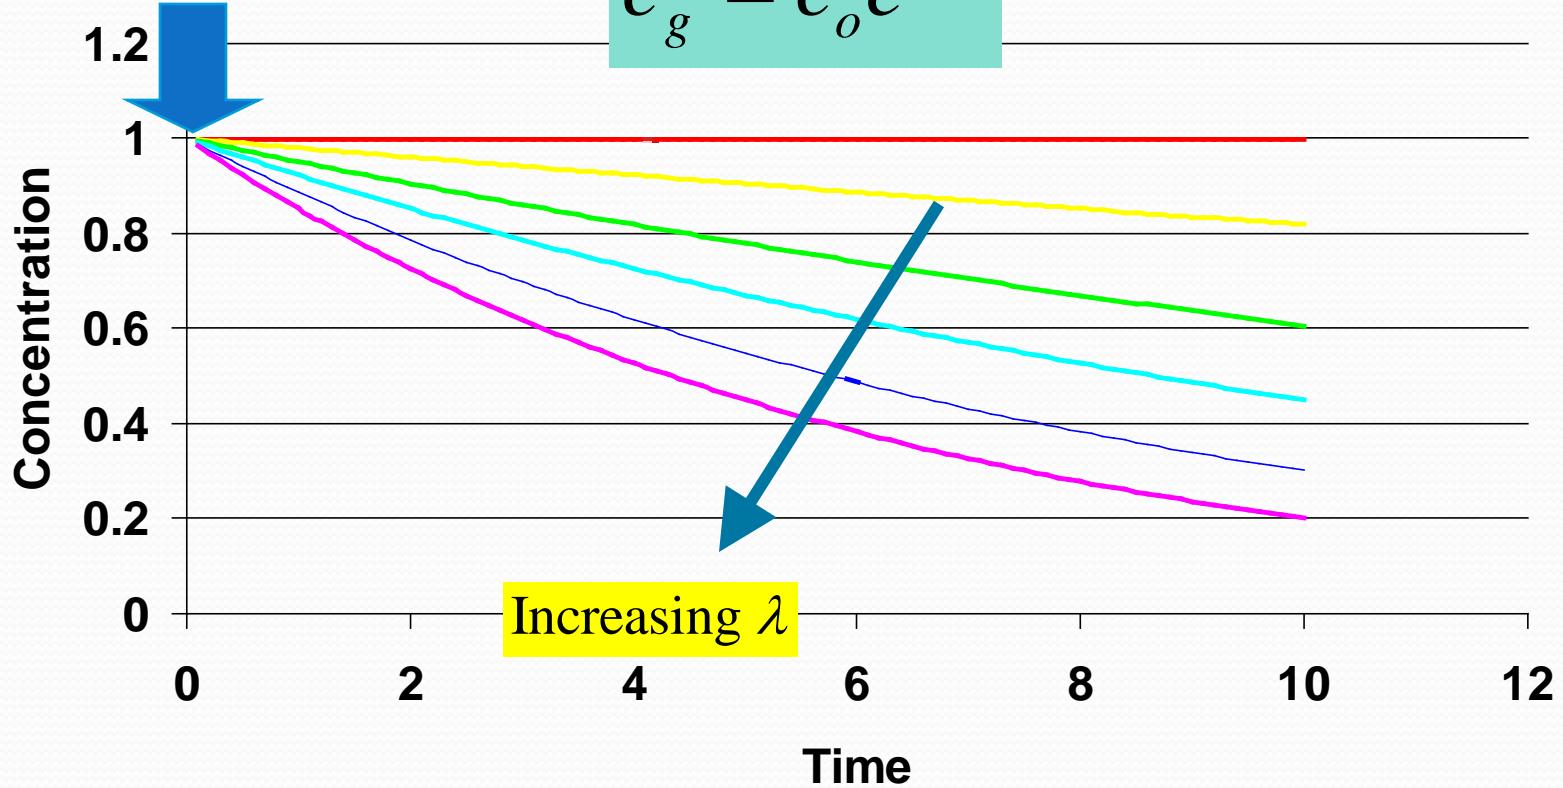

Impulse Loading

$$M = 3.85 \times 10^6 \text{ Kg}$$

$$Q = 10^6 \text{ m}^3/\text{d}$$


$$A = 1.1 \times 10^8 \text{ m}^2$$

$$V = 1.75 \times 10^9 \text{ m}^3$$

$$C_o = 2.2 \text{ mg/L} = M/V$$

$$k = 0.0002/\text{d}$$

$$C_g = C_o e^{-\lambda t}$$

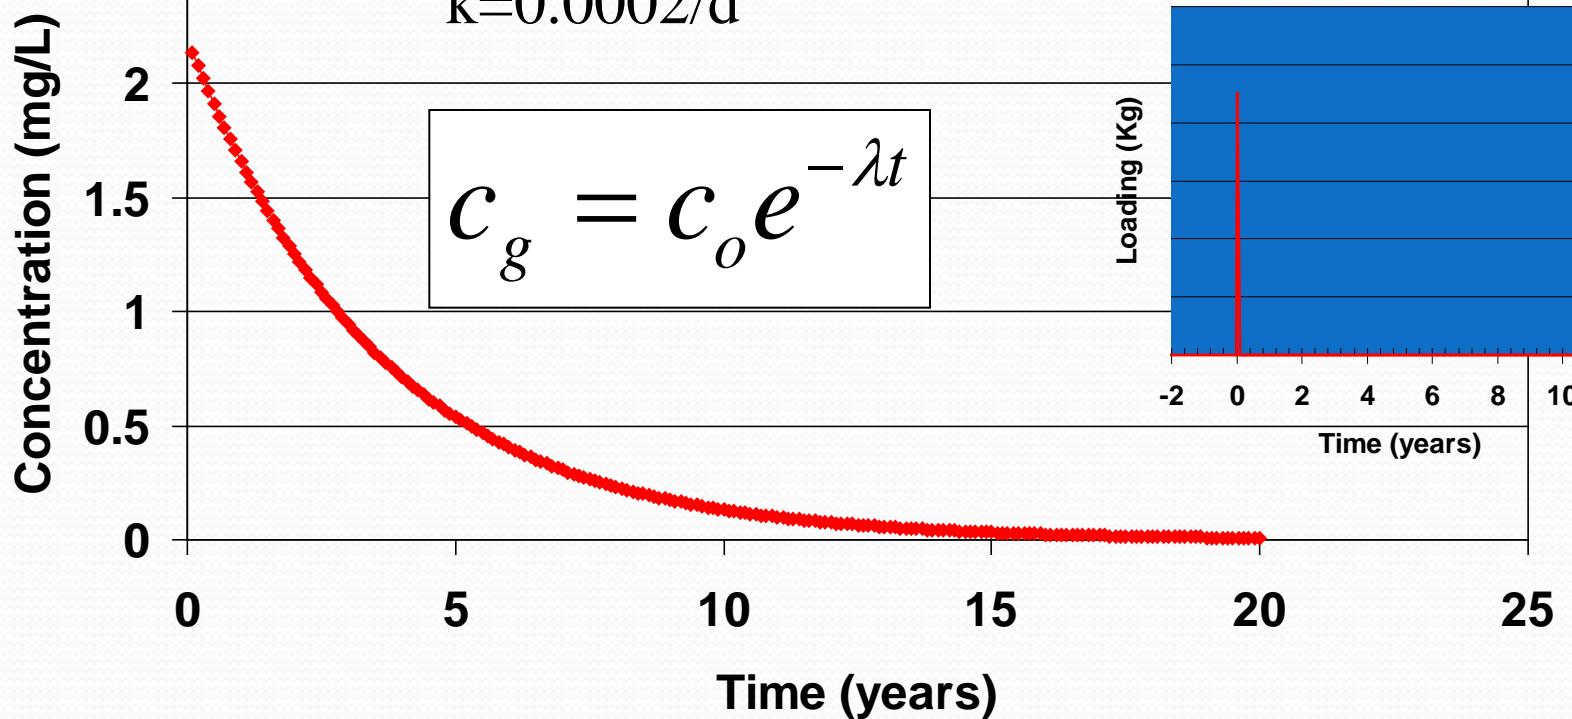

Solving for the particular solution

- Use the integrating factor method

$$\frac{dc}{dt} + \lambda c = \frac{W(t)}{V}$$

$$I = e^{\int \lambda dt} = e^{\lambda t}$$

$$e^{\lambda t} \frac{dc}{dt} + e^{\lambda t} \lambda c = e^{\lambda t} \frac{W(t)}{V}$$

$$\frac{d}{dt}(e^{\lambda t} c) = e^{\lambda t} \frac{dc}{dt} + e^{\lambda t} \lambda c$$

$$\frac{d}{dt}(e^{\lambda t} c) = e^{\lambda t} \frac{W(t)}{V}$$

$$\frac{dx}{dy} + p(y)x = g(y)$$

$$I = e^{\int p(y) dy}$$

$$e^{\lambda t} c \Big|_o^t = \frac{1}{V} \int e^{\lambda t} W(t) dt$$

$$ce^{\lambda t} - c_o = \frac{1}{V} \int e^{\lambda t} W(t) dt$$


$$c(t) = c_o e^{-\lambda t} + \frac{e^{-\lambda t}}{V} \int_o^t e^{\lambda t} W(t) dt$$

c_g

c_p

Step Loading


- $W=410 \text{ kg/d}$

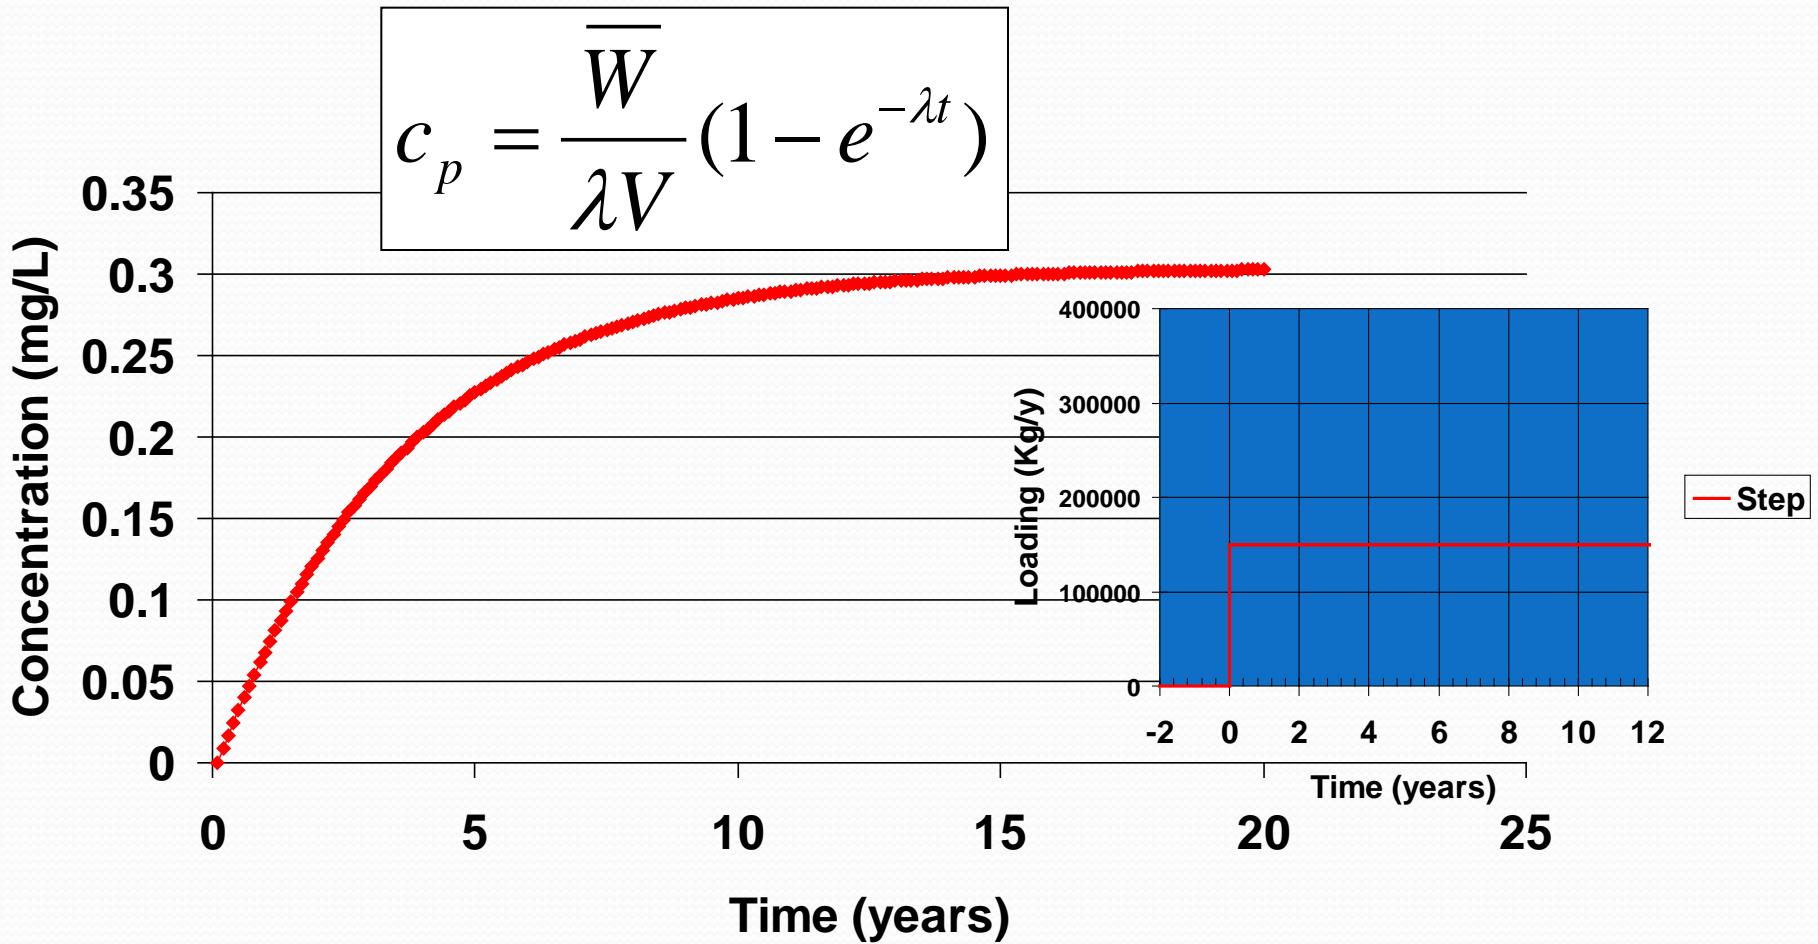

Linear Loading

- $W(t) = \beta_L t$

- $\beta_L = 60,000 \text{ kg/y}$


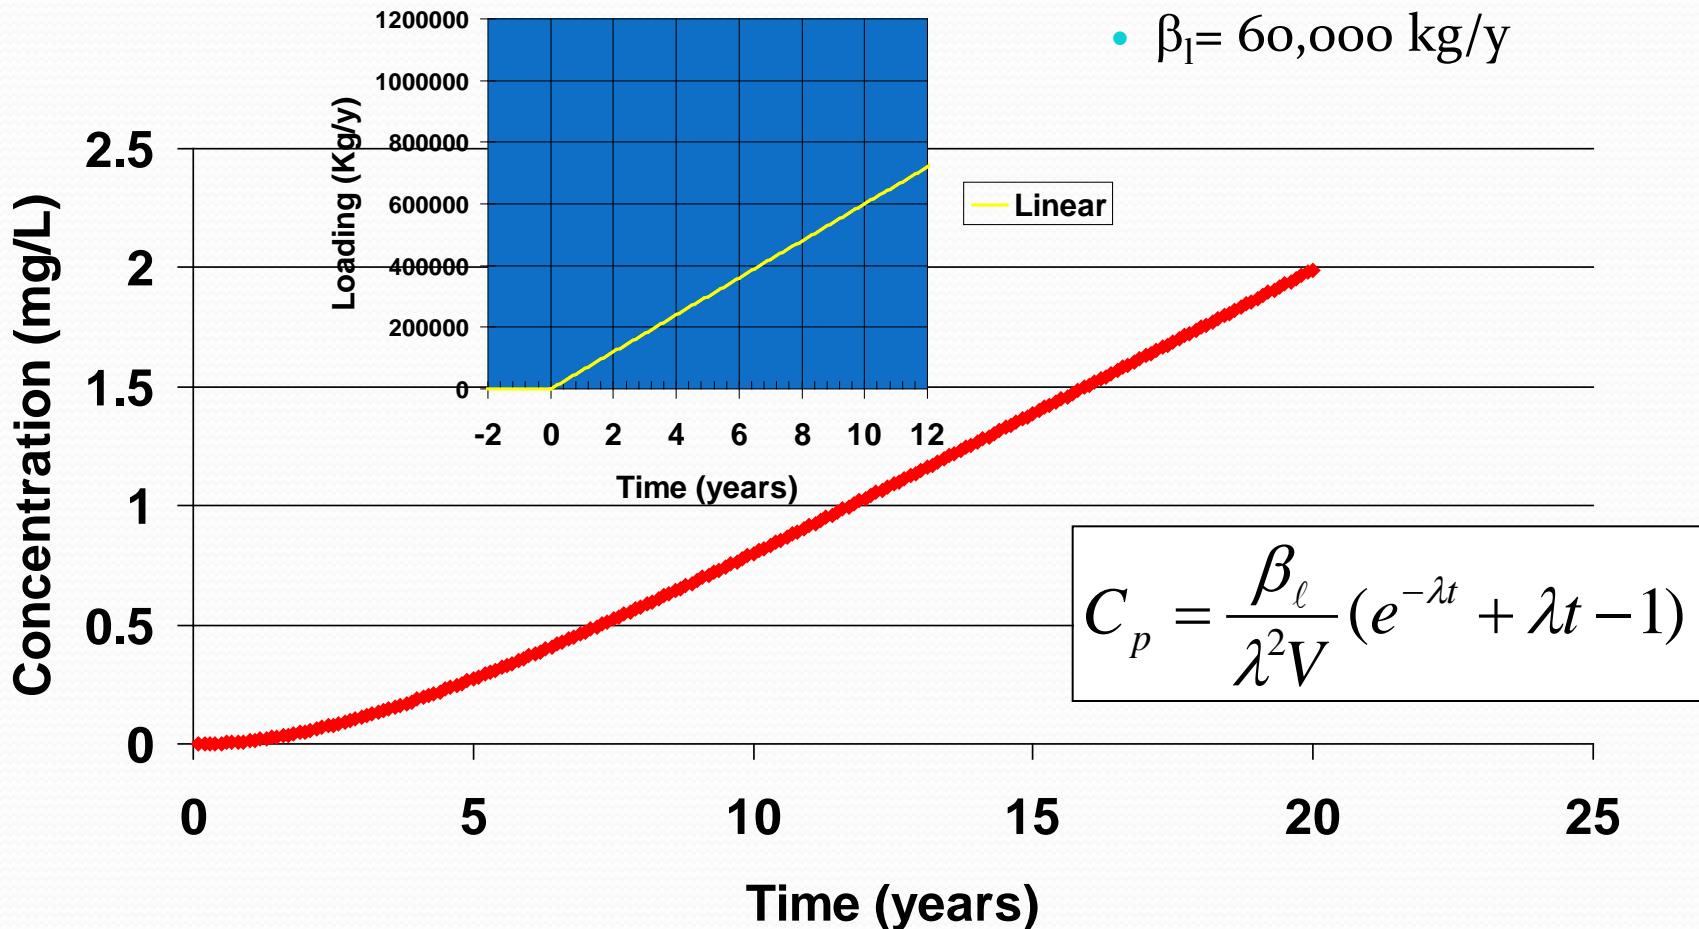


Exponential Loading

- $W(t) = W_e e^{\beta_e t}$

- $W_e = 1625 \text{ kg/d}$

- $\beta_e = 0.04558 / \text{yr}$

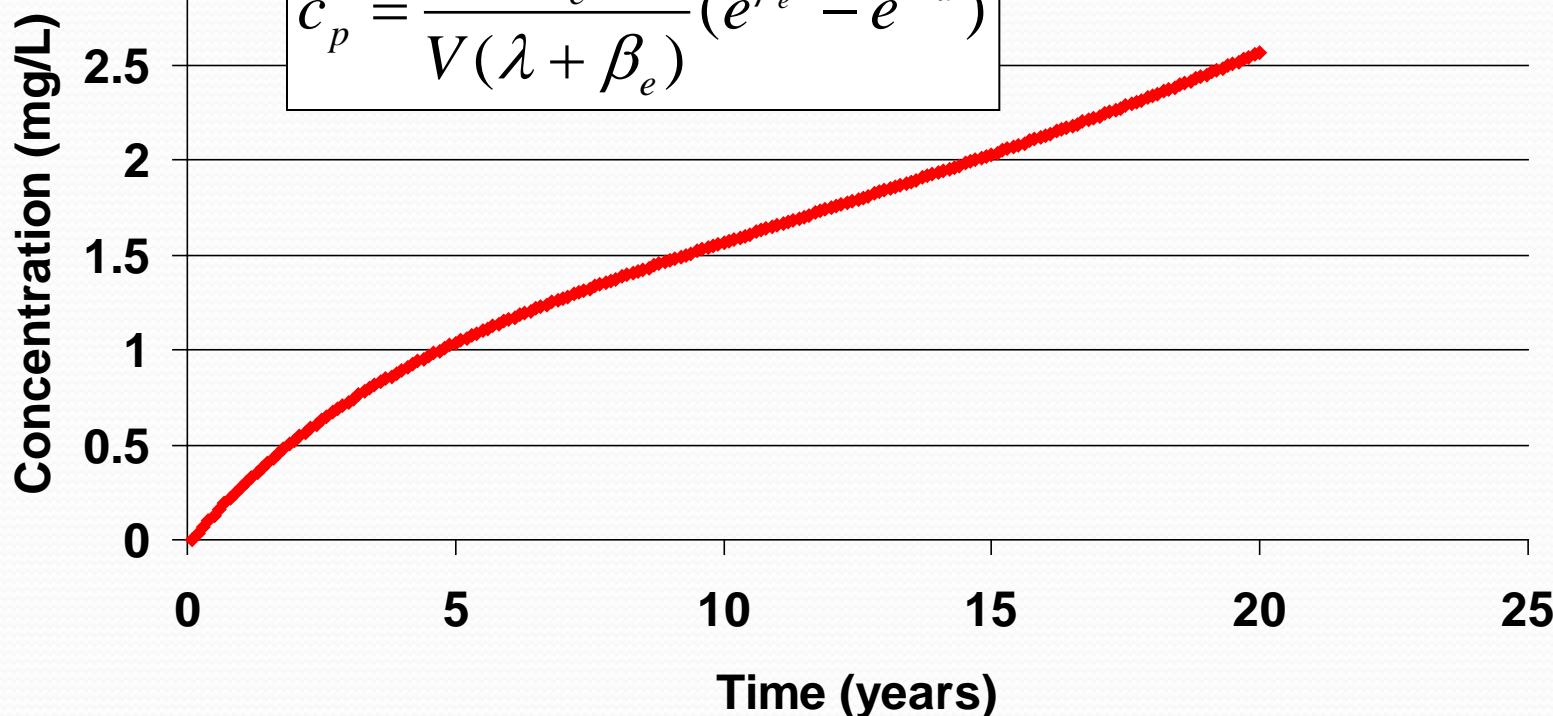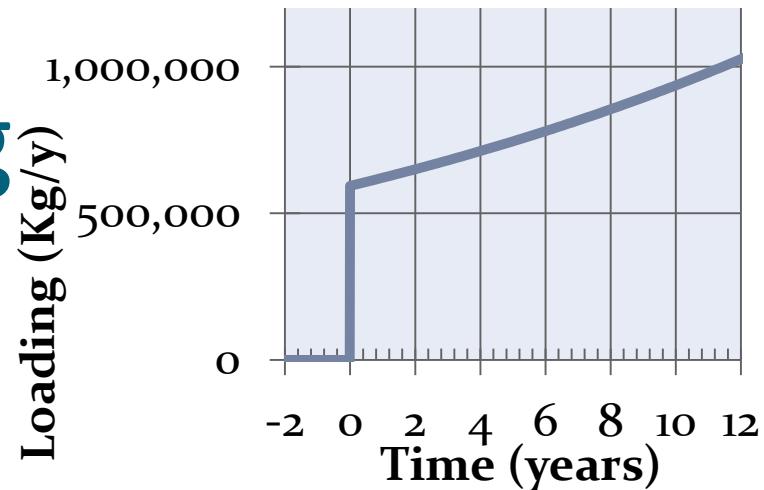

- To next lecture